


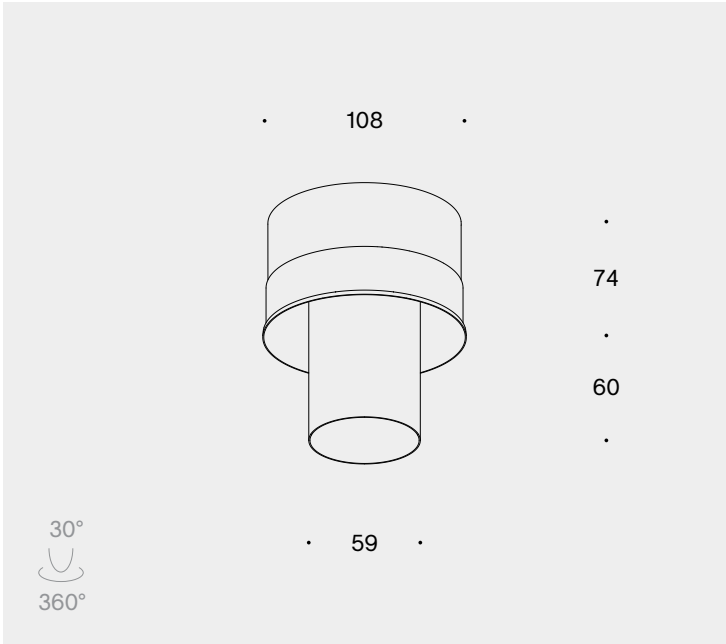

installation

light + ventilation | long

light specs



lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	97
SDCM	SDCM2	
class	class III	
tilt	30°	
location	indoor	
marking	CE	

ventilation specs

type / air flow	air extraction	max. 55 m³/h
	air supply	max. 30 m³/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

luminaire output

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
350mA (5.7W)	290lm	420lm	585lm	325lm	460lm	645lm
500mA (8.5W)	450lm	555lm	730lm	495lm	610lm	805lm
700mA (12.8W)	505lm	720lm	955lm	560lm	795lm	1055lm

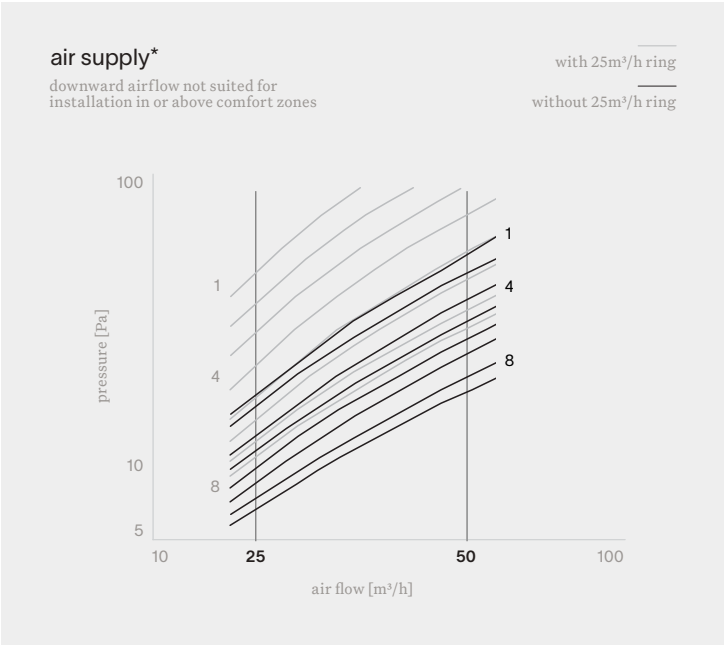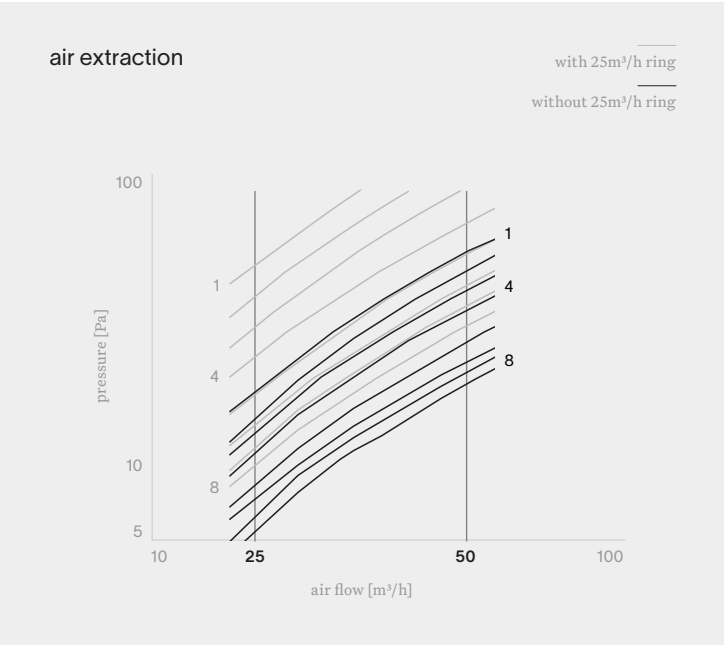

installation

light + ventilation | long

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111

	drivers
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027