


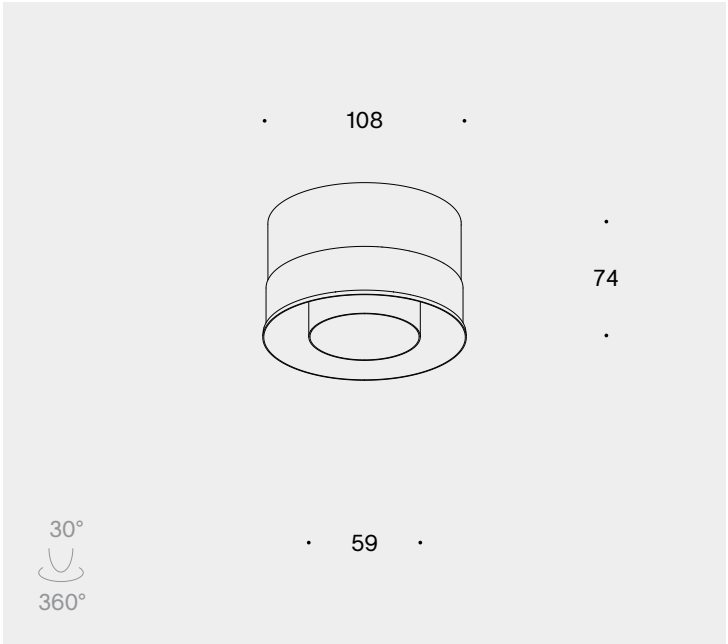

installation

light + ventilation | short

light specs



lamp	LED	
optic	glass lens	
driver	excluded	
IP	65	
CRI	90+	97
SDCM	SDCM2	
class	class III	
tilt	30°	
location	indoor	
marking	CE	

ventilation specs

type / air flow	air extraction	max. 55 m³/h
	air supply	max. 30 m³/h
pressure	7-75Pa	
noise level	<25dB(A)	
adjustment	32 steps	
lock mechanism	integrated	

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	-	420lm	585lm	585lm	-	460lm	645lm	645lm
500mA (8.5W)	-	555lm	730lm	730lm	-	610lm	805lm	805lm

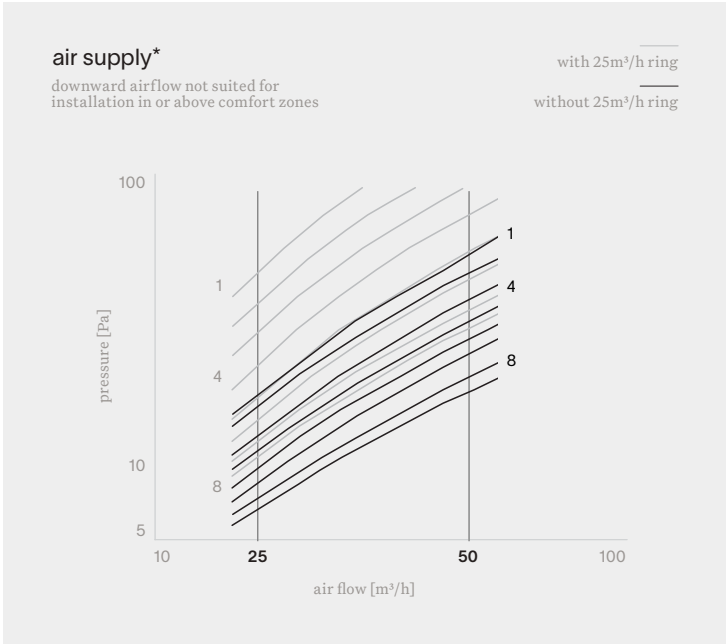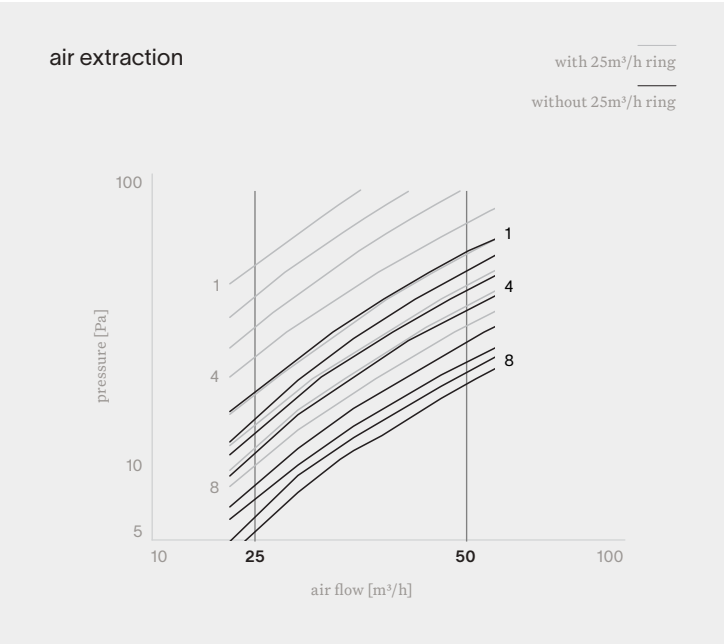

installation

light + ventilation | short

accessories

	installation
plaster ring Ø108	8000-0001
adjustable thick plaster ring Ø108 (12-33mm)	8000-0101
clt csc ring Ø108	8000-0011
concrete ring + cap Ø108	8000-0111

	drivers
DALI dimmable driver 38W	8000-0021
0-10V dimmable driver 36W	8000-0022
non-dimmable driver 42W	8000-0023
DALI dimmable driver 60W	8000-0026
DALI deep dim driver 20W	8000-0027